





11th Quarterly Report October-December 2022 AESF Research Project #R-121

Development of a Sustainability Metrics System and a Technical Solution Method for Sustainable Metal Finishing

by
Yinlun Huang*
Department of Chemical Engineering and Materials Science
Wayne State University
Detroit, Michigan, USA

Editor's Note: This NASF-AESF Foundation research project report covers the eleventh quarter of project work (October-December 2022) at Wayne State University in Detroit.

Overview

It is widely recognized in many industries that sustainability is a key driver of innovation. Numerous companies, especially large ones who made sustainability as a goal, are achieving clearly more competitive advantages. The metal finishing industry, however, is clearly behind others in response to the challenging needs for sustainable development.

This research project aims to:

- 1. Create a metal-finishing-specific sustainability metrics system, which will contain sets of indicators for measuring economic, environmental and social sustainability,
- 2. Develop a general and effective method for systematic sustainability assessment of any metal finishing facility that could have multiple production lines, and for estimating the capacities of technologies for sustainability performance improvement.
- 3. Develop a sustainability-oriented strategy analysis method that can be used to analyze sustainability assessment results, identify and rank weaknesses in the economic, environmental, and social categories, and then evaluate technical options for performance improvement and profitability assurance in plants, and
- 4. Introduce the sustainability metrics system and methods for sustainability assessment and strategic analysis to the industry.

This will help metal finishing facilities to conduct a self-managed sustainability assessment as well as identify technical solutions for sustainability performance improvement.

Progress Report (Quarter 11)

1. Student participation

Abdurrafay Siddiqui, a PhD student in the Pl's group, conducted research on this project in this reporting period. The student is financially supported mainly by Wayne State University's Graduate Teaching Assistantship Program, and partially by this AESF research project.

Detroit, MI 48202 Office: (313) 577-3771 E-mail: yhuang@wayne.edu

^{*} Dr. Yinlun Huang, Professor Dept. of Chemical Engineering and Materials Science Wayne State University







2. Project activities and progress

In this reporting period, our main effort concentrated on the continuous development of a computer-aided tool for sustainability assessment and decision making, with a focus on the coding for the decision making. We also presented our research at the AIChE Annual National Meeting in Phoenix, AZ, in mid-November.

In the 7th quarterly report, we described our initial effort on the development of a computer-aided prototype tool, named the Industrial Sustainability Assessment and Enhancement (ISAE) tool. That report included two screenshots shown in Figs. 1 and 2. In the 8th quarterly report, we reported that we hired an undergraduate senior student, who was guided to help develop a number of modules for sustainability assessment. The tool is currently able to assess a process' sustainability performance, after a set of sustainability indicators are selected, and plant data are input.



Figure 1 - Home screen design of the ISAE tool.

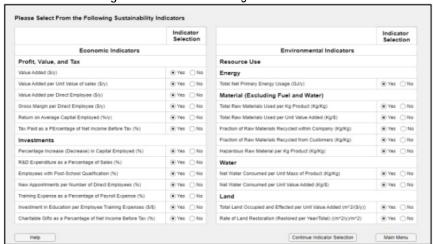


Figure 2 - Sample page to screen for indicator selection in the ISAE tool.

In this period, we continued the tool development, with a focus on the addition of functions for assessing the technology's capability of improving a process' sustainability performance. These include (1) the construction of a number of user interfaces for entering technology information, (2) the implementation of a methodology for technology assessment and (3) the implementation of the AHP method based weighting factor determination.







2.1. The ISAE tool development – Interface design for technology information acquisition

The Matlab tool starts with previously submitted data based on the sustainability assessment section. From this point, a tool user (or decision maker) needs to input the anticipated economic, environmental and social sustainability goals into the tool through an input dialog box, as shown in Fig. 3(a). Once the sustainability goals have been entered, the budget of the facility committed for the project is then entered in a dialog box, as shown in Fig. 3(b). The tool then prompts the user to input the number of technologies that are to be evaluated for adoption. Let the total number of individual technologies be N. It is possible that eventually, a plant needs to use multiple technologies for performance improvement. Thus, given N individual technology candidates, the total number of technology sets, each of which can contain one, two or even all N technologies, can be calculated as:

$$N_{Tech} = 2^N - 1 \tag{1}$$

where N_{Tech} is the total number of technology sets. The tool then prints out each technology set and asks the user for input regarding the cost of adopting those technology set(s) (Fig. 3(c)) as well as the percentage improvement data (Fig. 3(d)).

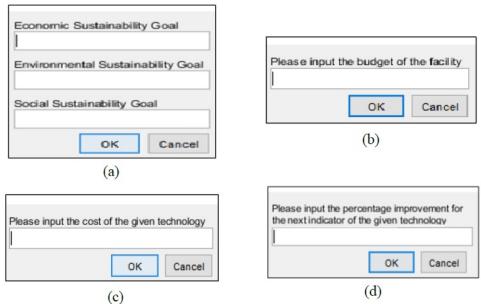


Figure 3 - Tool interface design for the input of: (a) sustainability goal setting, (b) budget limit, (c) technology cost and (d) technology performance.

2.2. Module development for evaluating technology set sustainability performance and the process performance improvement after technology set implementation

With all necessary data and information about the technology sets and the plant's expectations on minimum performance improvement, the ISAE tool should contain the methodology for technology evaluation. Note that each technology set must be evaluated for its capacity for performance improvement. The following equations are implemented in the tool:

$$E_i(P|T_I) = E_i(P) + \Delta E_i(P|T_i) \tag{2}$$

$$V_i(P|T_I) = V_i(P) + \Delta V_i(P|T_i) \tag{3}$$

$$L_i(P|T_I) = L_i(P) + \Delta L(P|T_i) \tag{4}$$







where $E_i(P)$, $V_i(P)$ and $L_i(P)$ are, respectively, the individual indicator-based economic, environmental and social sustainability assessment results of the facility; $\Delta E_i(P \mid T_j)$, $\Delta V_i(P \mid T_j)$ and $\Delta L_i(P \mid T_j)$ are, respectively, the indicator-based performance change of economic, environmental and social sustainability if technology set T_j is adopted; $E_i(P \mid T_j)$, $V_i(P \mid T_j)$ and $L_i(P \mid T_j)$ are, respectively, the indicator-based performance of economic, environmental and social sustainability if technology set T_j is implemented in the plant.

Each technology set needs to be evaluated by all sustainability indicators separately. The evaluation results will be combined to derive the categorized sustainability $[E(P \mid T_j), V(P \mid T_j)]$ and $L(P \mid T_j)$ using the following equations:

$$E(P|T_I) = \sum_{i=1}^{N_E} a_i E_i(P|T_i)$$
(5)

$$V(P|T_j) = \sum_{i=1}^{N_V} b_i V_i(P|T_j)$$
(6)

$$L(P|T_I) = \sum_{i=1}^{N_L} c_i L_i(P|T_i) \tag{7}$$




Figure 4 - Design of a module for demonstrating technology-based sustainability performance improvement.

where N_E , N_V and N_L are, respectively, the total number of indicators in the economic, environmental and social sustainability categories; a_i , b_i and c_i are the weighing factors for the corresponding indicators in the economic, environmental and social sustainability categories.

The above equations and the nine-step optimal technical solution method listed in the 10th quarterly report are being coded in the ISAE tool. Figure 4 shows a design of the module in the tool that demonstrates technology based sustainability performance of an electroplating facility before and after implementing a technology set in a sustainability cube. It shows clearly how the process sustainability performance is changed, through comparing the values of E(P) vs. $E(P \mid T_j)$, V(P) vs. $V(P \mid T_j)$.

3.3. Module for weighting factor determination by the AHP method

In the 6th quarterly report, we presented a case study that contained the values of 11 weighting factors that were associated with 11 sustainability indicators. Those values are summarized from that report in Table 1. Those values were calculated using the AHP method, originally developed by Thomas Saaty in 1980. The method needs to be fully implanted in the ISAE tool. Here we list all equations that are being coded:

1. <u>Determination of relative importance of sustainability indicators for assessment</u>. The relative importance of each pair of sustainability indicators, e.g., environmental indicators V_i vs. V_j , needs to be determined by the decision maker using Saaty's AHP method shown in Table 2.

Table 1 – Weighting factors.

	rroignang ia				
Weighing	Assigned	Factor			
Factor	Indicator	Value			
a_1	E_1	3.51			
\mathbf{a}_2	E_2	3.51			
\mathbf{a}_3	E_3	1.09			
a_4	E_4	1.89			
b_1	V_1	0.62			
b_2	V_2	1.53			
b ₃	V_3	1.53			
b ₄	V_4	6.32			
c_1	L_1	2.79			
c_2	L_2	0.72			
c ₃	L_3	6.49			

2. <u>Construction of a relative importance matrix</u>. The relative importance matrix, M_{AHP} , has the following structure. For a categorized sustainability using N indicators, the matrix is:







NASF SURFACE TECHNOLOGY WHITE PAPERS

87 (6), 1-8 (March 2023)

Table 2 - Relative importance for the AHP method

rable 2 relative importance for the 7th method.				
Relative	Definition			
Importance				
1	Equal Importance			
3	Somewhat More Important			
5	Much More Important			
7	Very Much More Important			
9	Absolutely More Important			
2,4,6,8	Intermediate Values			

$$M_{AHP} = \begin{bmatrix} W_{1,1} & W_{1,2} & \vdots & W_{1,N} \\ W_{2,1} & W_{2,2} & \dots & W_{2,N} \\ \vdots & \vdots & \vdots & \vdots \\ W_{N,1} & W_{N,2} & \dots & W_{N,N} \end{bmatrix}$$
(8)

where $W_{i,j}$ is the relative importance between the ith and jth vectors. Note that , $W_{i,j} = 1$ if i = j and $W_{i,j} = 1/W_{j,i}$ if $i \neq j$.

3. Calculation of weighting factors. There are a few steps to follow in the calculation of weighting factor vectors. They are:

$$M_{NR} = \begin{bmatrix} NR_1 \\ NR_2 \\ \vdots \\ NR_N \end{bmatrix} \tag{9}$$

$$NR_T = \sum_{i=1}^N NR_i \tag{10}$$

where M_{NR} is the matrix of the nth roots; NR_i is ith root of the products of the factors in the i-th row; and NR_T is the sum of all the roots.

$$\alpha_{AHP} = \begin{bmatrix} \alpha_1 \\ \alpha_2 \\ \vdots \\ \alpha_N \end{bmatrix} \tag{11}$$

$$\alpha_i = \frac{NR_i}{NRT} \tag{12}$$

where α_i is the weighing factor of ith indicator.

4. <u>Consistency checking</u>. To confirm the consistency of the calculated weight factor values, the following formulas also need be coded:

$$\bar{\rho}_{AHP} = \begin{bmatrix} \rho_1 \\ \rho_2 \\ \vdots \\ \rho_N \end{bmatrix} = \alpha_{AHP} \times M_{AHP} \tag{13}$$

$$\bar{\lambda}_{AHP} = \begin{bmatrix} \lambda_1 \\ \lambda_2 \\ \vdots \\ \lambda_L \end{bmatrix} = \frac{\rho_{AHP}}{\alpha_{AHP}} \tag{14}$$

$$\lambda_{Ave} = \frac{\sum_{i=1}^{N} \lambda_i}{N} \tag{15}$$

$$CI = \frac{\lambda_{Ave} - N}{N - 1} \tag{16}$$

$$CR = \frac{CI}{\eta} \tag{17}$$







where $\bar{\rho}_{AHP}$ is the vector resulting from multiplying the eigenvector to the AHP matrix; λ_i is the estimate for the eigenvalue from the ith row; λ_{Ave} is the average of the eigenvalue estimates; CI is the consistency index; CR is the consistency ratio; and η is the Saaty consistency index denominator.

Example. We have tested the calculation for four environmental vectors. V_1 to V_4 , using the formulas listed above. Table 3 shows the relative importance value between each pair of indicators. Using the method, the following matrix and vectors are obtained:

$$M_{AHP,Env} = \begin{bmatrix} 1 & 1/3 & 1/3 & 1/7 \\ 3 & 1 & 1 & 1/5 \\ 3 & 1 & 1 & 1/5 \\ 7 & 5 & 5 & 1 \end{bmatrix}$$
 (18)

$$M_{AHP,Env} = \begin{bmatrix} 3 & 1 & 1 & 1/5 \\ 7 & 5 & 5 & 1 \end{bmatrix}$$

$$[0.355]$$

Table 3 – Assignment of relative importance of the four environmental indicators.

Indicators	V_1	V_2	V_3	V_4
V_1	1	1/3	1/3	1/7
V_2	3	1	1	1/5
V_3	3	1	1	1/5
V_4	7	5	5	1

$$M_{NR,Env} = \begin{bmatrix} 0.355\\ 0.880\\ 0.880\\ 3.637 \end{bmatrix} \tag{19}$$

The weighting factors, b_1 to b_4 , for environmental indicators V_1 to V_4 , are derived below, which are the same as those shown in Table 1.

$$B_{AHP} = \begin{bmatrix} b_1 \\ b_2 \\ b_3 \\ b_4 \end{bmatrix} = \begin{bmatrix} 0.62 \\ 1.53 \\ 1.53 \\ 6.32 \end{bmatrix}$$
 (20)

We also obtained the results for the consistency ratio as follows:

$$\bar{\lambda}_{AHP} = \begin{bmatrix} 4.10 \\ 4.04 \\ 4.04 \\ 4.11 \end{bmatrix} \tag{21}$$

$$\lambda_{Ave} = 4.0725 \tag{22}$$

$$CI = 0.024$$
 (23)

$$CR = 0.027$$
 (24)

Since the consistency ratio value (CR) is below 0.1, the weighting factors shown in Eq. (21) are consistent. The implementation of the AHP-based weighting factor derivation is in general for any type of sustainability problems.

2.4. Presentation activities

In this period, the PI and his students presented three papers as follows, each of which has a focus on sustainable metal finishing:

- Y. Huang, "Life-Cycle-Based Multiscale Sustainability: Challenges and Opportunities in the Era of Industry 4.0," plenary speech at the AlChE Annual National Meeting in Phoenix, AZ, Nov. 13-18, 2022.
- A. Siddiqui, M. Moghadasi and Y. Huang, "Plant-Wide Digital Twinning of Surface Finishing for Sustainable Manufacturing," Paper No. 86c,, presented at the AIChE Annual National Meeting, Phoenix, AZ, Nov. 13-18, 2022.
- A. Siddiqui and Y. Huang, "Technology Assessment and Impact Analysis for Life Cycle-Based Sustainability Improvement," Paper No. 613a, presented at the AIChE Annual National Meeting, Phoenix, AZ, Nov. 13-18, 2022.







3. Plan for the 12th quarter of the project

We will continue to work on the Matlab based tool, ISAE. The tool will be used to conduct more case studies. Besides, we plan to report our research progress on the digital twinning for sustainable metal finishing through developing digital models for characterizing the sustainability performance of electroplating systems.

4. Past project reports

- Quarter 1 (April-June 2020): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 84

 (12), 14 (September 2020); Full paper: http://short.pfonline.com/NASF20Sep1
- 2. Quarter 2 (July-September 2020): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 85 (3), 13 (December 2020); Full paper: http://short.pfonline.com/NASF20Dec1
- 3. Quarter 3 (October-December 2020): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 85 (7), 9 (April 2021); Full paper: http://short.pfonline.com/NASF21Apr1.
- 4. Quarter 4 (January-March 2021): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 85 (11), 13 (August 2021); Full paper: http://short.pfonline.com/NASF21Aug1.
- 5. Quarter 5 (April-June 2021): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 86 (1), 19 (October 2021); Full paper: http://short.pfonline.com/NASF21Oct2
- 6. Quarter 6 (July-September 2021): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 86 (4), 19 (January 2022); Full paper: http://short.pfonline.com/NASF22Jan3
- 7. Quarter 7 (October-December 2021): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 86 (7), 17 (April 2022); Full paper: http://short.pfonline.com/NASF22Apr2
- 8. Quarter 8 (January-March 2022): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 86 (10), 17 (July 2022); Full paper: http://short.pfonline.com/NASF22Jul2
- 9. Quarter 9 (April-June 2022): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 87 (1), 17 (October 2022); Full paper: http://short.pfonline.com/NASF22Oct1
- 10. Quarter 10 (July-September 2022): Summary: NASF Report in Products Finishing; NASF Surface Technology White Papers, 87 (4), 17 (January 2023); Full paper: http://short.pfonline.com/NASF23Jan2

6. About the Principal Investigator



Dr. Yinlun Huang is a Professor at Wayne State University (Detroit, Michigan) in the Department of Chemical Engineering and Materials Science. He is Director of the Laboratory for Multiscale Complex Systems Science and Engineering, the Chemical Engineering and Materials Science Graduate Programs and the Sustainable Engineering Graduate Certificate Program, in the College of Engineering. He has ably mentored many students, both Graduate and Undergraduate, during his work at Wayne State.

He holds a Bachelor of Science degree (1982) from Zhejiang University (Hangzhou, Zhejiang Province, China), and M.S. (1988) and Ph.D. (1992) degrees from Kansas State University (Manhattan, Kansas). He then joined the University of Texas at Austin as a postdoctoral research

fellow (1992). In 1993, he joined Wayne State University as Assistant Professor, eventually becoming Full Professor from 2002 to the present. He has authored or co-authored over 220 publications since 1988, a number of which have been the recipient of awards over the years.

His research interests include multiscale complex systems; sustainability science; integrated material, product and process design and manufacturing; computational multifunctional nano-material development and manufacturing; and multiscale information processing and computational methods.

He has served in many editorial capacities on various journals, as Co-Editor of the ASTM Journal of Smart and Sustainable Manufacturing Systems, Associate Editor of Frontiers in Chemical Engineering, Guest Editor or member of the Editorial Board, including the ACS Sustainable Chemistry and Engineering, Chinese Journal of Chemical Engineering, the Journal of Clean







Technologies and Environmental Policy, the Journal of Nano Energy and Power Research. In particular, he was a member of the Editorial Board of the AESF-published Journal of Applied Surface Finishing during the years of its publication (2006-2008).

He has served the AESF and NASF in many capacities, including the AESF Board of Directors during the transition period from the AESF to the NASF. He served as Board of Directors liaison to the AESF Research Board and was a member of the AESF Research and Publications Boards, as well as the Pollution Prevention Committee. With the NASF, he served as a member of the Board of Trustees of the AESF Foundation. He has also been active in the American Chemical Society (ACS) and the American Institute of Chemical Engineers (AIChE).

He was the 2013 Recipient of the NASF William Blum Scientific Achievement Award and delivered the William Blum Memorial Lecture at SUR/FIN 2014 in Cleveland, Ohio. He was elected AlChE Fellow in 2014 and NASF Fellow in 2017. He was a Fulbright Scholar in 2008 and has been a Visiting Professor at many institutions, including the Technical University of Berlin and Tsinghua University in China. His many other awards include the AlChE Research Excellence in Sustainable Engineering Award (2010), AlChE Sustainable Engineering Education Award (2016), the Michigan Green Chemistry Governor's Award (2009) and several awards for teaching and graduate mentoring from Wayne State University, and Wayne State University's Charles H. Gershenson Distinguished Faculty Fellow Award. Most recently, he received the AlChE Lawrence K. Cecil Award honoring his contribution in environmental sustainability research, education and leadership (2022).